


Soken Tape SCA218FIL

Technical Data Sheet

General Description A high strength filament with backing, consisting of high strength and glass filaments the Tape has high Adhesion and Holding power. Its strength makes it suitable for most bunding and reinforcing operations.

Product Construction

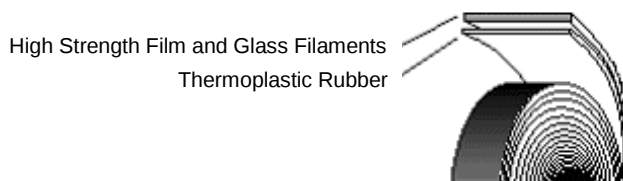

Tape Thickness: 0.13 ± 0.01 mm

Applications

- Palletizing of cartons in warehousing to conserve floor space.
- Strapping rods, Moldings, Tubes, Plywood without danger of scratching, staining or damaging.
- Reinforcing cartons, Protecting contents from pilferage.
- Holding doors, Loose parts on stoves, refrigerators while in transit.
- Strength/Ease of Handling/Suits most applications/High tack/Waterproof

Technical Datas

Test Item	Unit	Value
Total thickness	mm	0.13 ± 0.01
Adhesion	N/inch	20
Tensile Strength	N/inch	500
Elongations	%	5
Holding Power	HRS	>72 hrs

Shelf Life

Six months from the date of delivery when stored in original packing at stable condition warehouse, with temperature lower than 40°C and up to 70% Relative Humidity with no direct sunlight.

DISCLAIMER: The above figures are taken from experiments conducted under standard conditions at Soken Chemical Asia Co.,Ltd. They are not meant to be guaranteed values, to serve as reference only. Thorough evaluation of the actual application of Adhesive Tape must be conducted before use.